

RX14K, RX14KPS & RX14KIS

Surface Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS



RX14KIS Shown

Site Specifications


Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	125-150 PSI (8.6-10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700 kPa) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)

Product Specifications

Max. Vehicle Weight	14,000 lbs. (6300 kg)
Max. Wheelbase	
General Service	187 in. (4750 mm)
Two-Wheel Alignment	182 in. (4623 mm)
Four-Wheel Alignment	158 in. (4013 mm)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed, 60 seconds
Lowering Speed	2 speed, 25 seconds

MODEL FEATURES / DIMENSIONS / OPTIONS

Features	K	KPS	KIS	Dimensions		Options		
9000-lb Swing Air Jacks (2)	✓	✓	✓	Width (W1)	92.5 in. 2350 mm	Approach Ramp Extensions (Back)	5 in. 127 mm	20-3113-1
Two-Speed Lowering	✓	✓	✓	Inside Width (W2)	40 in. 1016 mm	Approach Ramp Extensions (Back)	27 in. 686 mm	20-2169-1
FIA Fully Integrated Alignment		✓	✓	Length (L)	268.5 in. 6820 mm	Approach Ramp Extensions (Back)	37 in. 940 mm	20-2189-1
POWER SLIDE		✓	✓	Elevated Length (L2)	243 in. 6172 mm	Conventional Sensor Extensions (Front)	12 in. 305 mm	20-2497-1
INFLATION STATION			✓	Runway Width (R)	26 in. 660 mm	Drive-Thru Kit (Front)	53 in. 1346 mm	20-2498-1
				Raised Height (H1)	72 in. 1829 mm	Extended Drive-Thru Kit (Front)	61 in. 1549 mm	20-2501-1
				Stack Height (H2)	10.75 in. 273 mm			

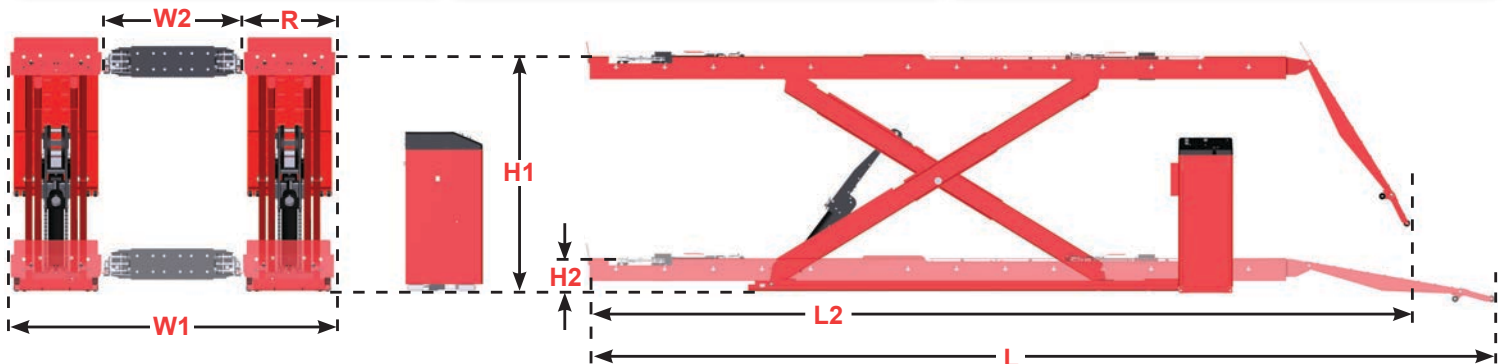

Continued on Page 2

For lift rack information visit:
www.hunter.com/lift-racks

For general inquiries visit:
www.hunter.com
or call
800-448-6848


For local contact visit:
www.hunter.com/contact-hunter

RX14K, RX14KPS & RX14KIS

Surface Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS

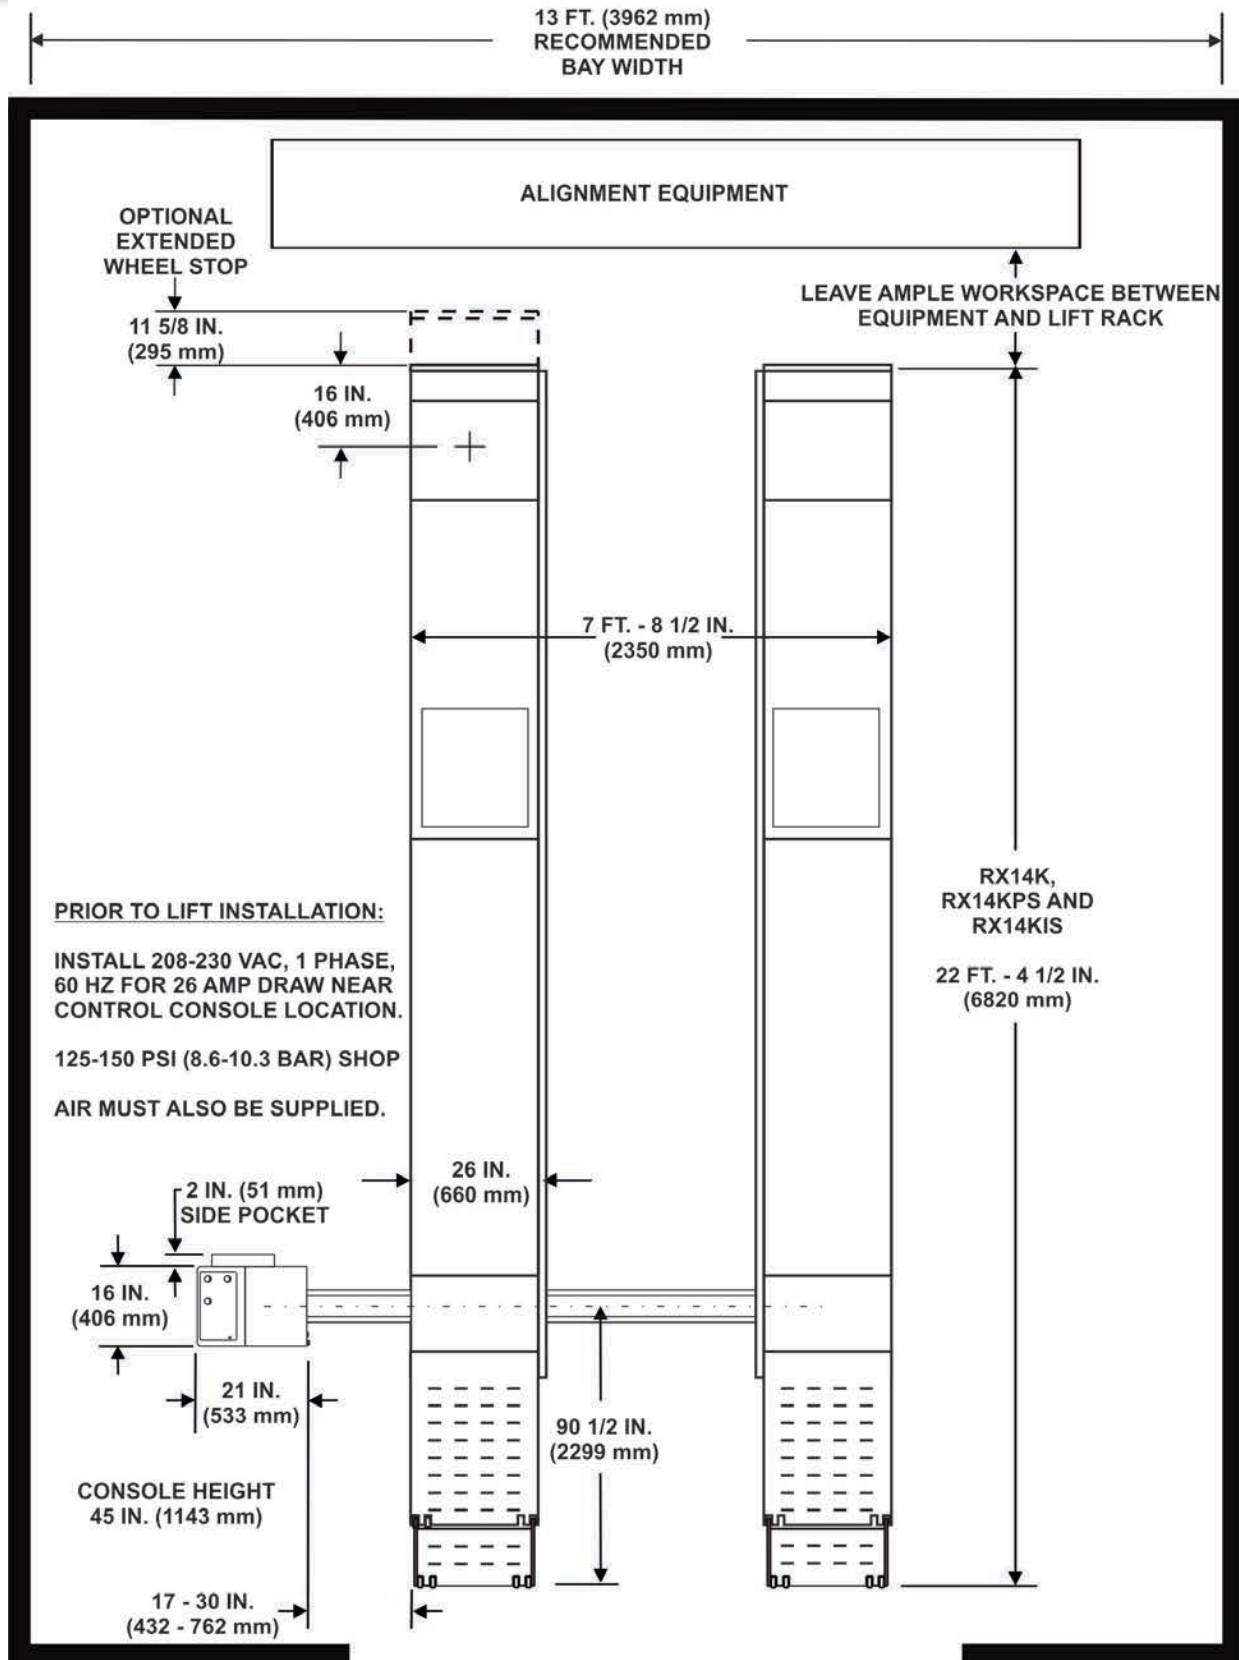

*Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 16.5 feet (5029 mm) at the turnplate end. Additional threshold and perhaps hydraulic hoses will be required (refer to Installation Instruction for details).