


RX16KFIS

Flush Mount Lift Rack

SPECIFICATIONS

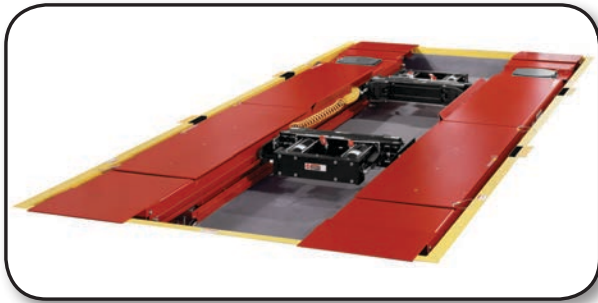

RX16KFIS Shown

Site Specifications

Floor Pocket Requirements	Refer to 7494-T for full details
Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	90-150 PSI (6.2-10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700kPA) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)


Product Specifications

Max. Vehicle Weight	16,000 lbs. (7200 kg)
Max. Wheelbase	
General Service	187 in. (4750 mm)
Two-Wheel Alignment	182 in. (4623 mm)
Four-Wheel Alignment	158 in. (4013 mm)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed 60 seconds
Lowering Speed	2 speed, 25 seconds

MODEL FEATURES / DIMENSIONS

Features	KFIS
9000-lb Swing Air Jacks (2)	✓
Two-Speed Lowering	✓
FIA Fully Integrated Alignment	✓
POWER SLIDE	✓
INFLATION STATION	✓

Dimension	
Outside Width (W1)	92.5 in. 2350 mm
Inside Width (W2)	40 in. 1016 mm
Length (L)	231.375 in. 5877 mm
Runway Width (R)	26 in. 660 mm
Raised Height (H1)	71 in. 1803 mm
Depth (H2)	12.25 to 12.75 in. 311 to 326 mm

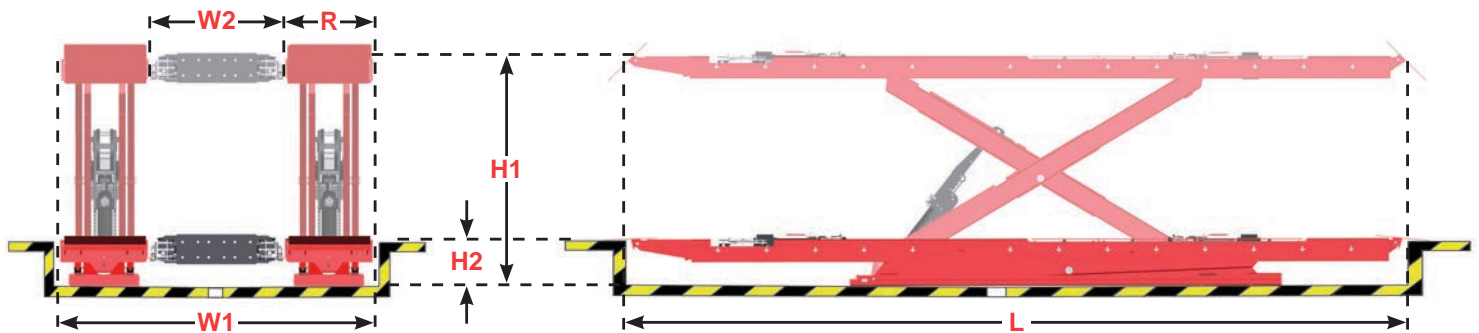


Continued on Page 2

For lift rack information visit:
www.hunter.com/lift-racks

For general inquiries visit:
www.hunter.com
or call
800-448-6848

For local contact visit:
www.hunter.com/contact-hunter

SPECIFICATIONS (Refer to 7494-T for construction drawings)

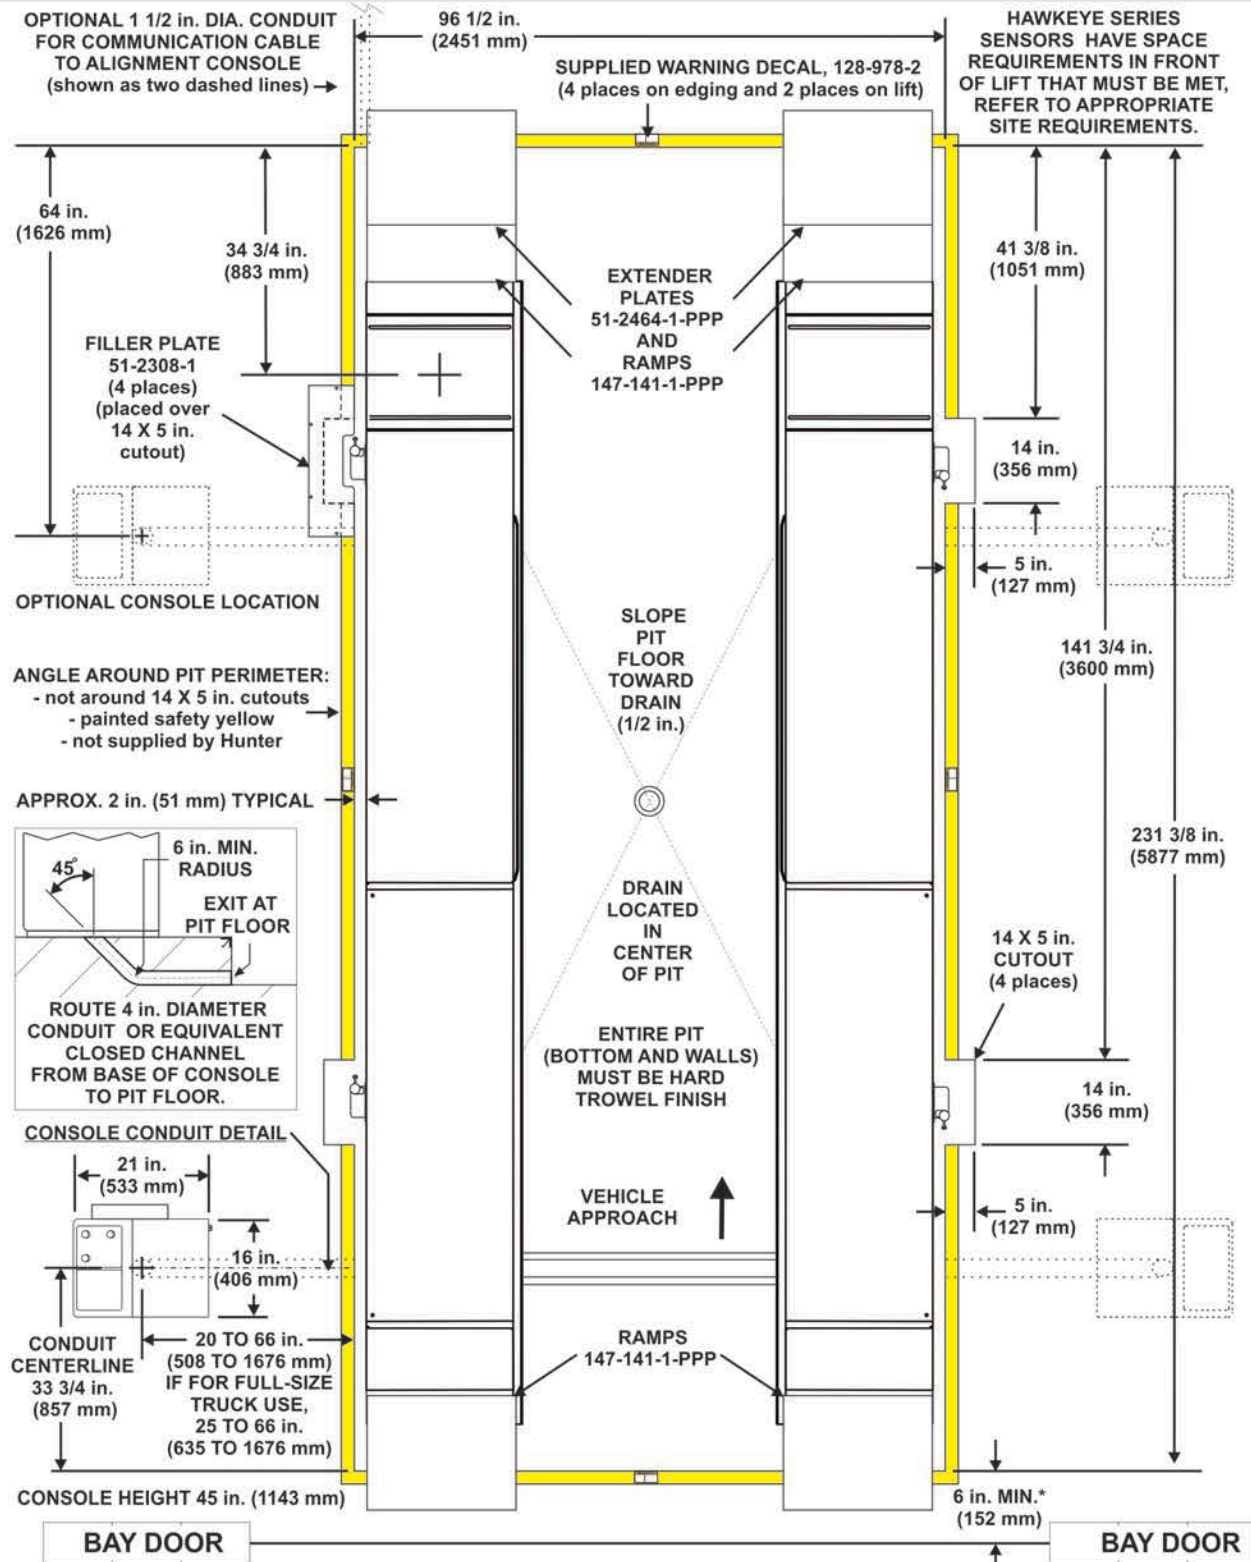

* LONGER VEHICLES WILL NEED TO BE SERVICED WITH THE BAY DOOR OPEN. TO ACCOMMODATE MOST VEHICLES, INCREASE THE SPACE BEHIND THE PIT TO 39 in. (991 mm) OR GREATER.

Dimensions shown are for end result. Tile thickness (if applicable) must be considered before pouring concrete. Positioning of control console is limited to a maximum space between console and rack of 5 1/2 feet (1676 mm) at the approach ramp end and 16 feet (4877 mm) at the turnplate end.