

RX10K & RX10KL (std, PS & IS)

Surface Mount Lift Rack



SPECIFICATIONS




RX10KLIS Shown

Site Specifications		
Power Requirements	208-230 VAC, single phase power, 26 Amp	
Air Supply Requirements	125-150 PSI (8.6-10.3 bar)	
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700 kPA) rating	
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)	
Product Specifications		
	RX10K	RX10KL
Max Vehicle Weight	10,000 lbs. (4500 kg)	
Max Wheelbase		
General Service	171 in. (4343 mm)	184 in. (4673 mm)
Two-Wheel Alignment	166 in. (4216 mm)	179 in. (4547 mm)
Four-Wheel Alignment	158 in. (4013 mm)	158 in. (4013 mm)
Alignment Height	All lock positions	
Min. Four-Wheel Alignment	88 in. (2235 mm)	
Lifting Speed	1 speed, 55 seconds	
Lowering Speed	2 speed, 25 seconds	

MODEL FEATURES / DIMENSIONS / OPTIONS

Feature	std	PS	IS	Dimension	Options	Add Length	Kit #	
6000-lb Swing Air Jacks (2)	✓	✓	✓	Length (L)	Approach Ramp Extensions (Back)	13 in. 330 mm	20-3112-1	
Two-Speed Lowering	✓	✓	✓	All RX10K Models - 241.25 in. (6128 mm)	Approach Ramp Extensions (Back)	18 in. 457 mm	20-3113-1	
	✓	✓	✓	Elevated Length (L2)	Approach Ramp Extensions (Back)	40 in. 1016 mm	20-2169-1	
				All RX10K Models - 217.25 in. (5518 mm)	Approach Ramp Extensions (Back)	50 in. 1270 mm	20-2189-1	
	✓	✓	✓	All RX10KL Models - 254.25 in. (6458 mm)	Conventional Sensor Extensions (Front)	12 in. 305 mm	20-2497-1	
				Outside Width (W1)	88.5 in. (2248 mm)	Drive-Thru Kit (Front)	53 in. 1346 mm	20-2498-1
	✓	✓	✓	Inside Width (W2)	40 in. (1016 mm)	Extended Drive-Thru Kit (Front)	61 in. 1549 mm	20-2501-1
				Runway Width (R)	24 in. (610 mm)			
				Raised Height (H1)	72 in. (1829 mm)			
				Depth (H2)	8.75 in. (222 mm)			

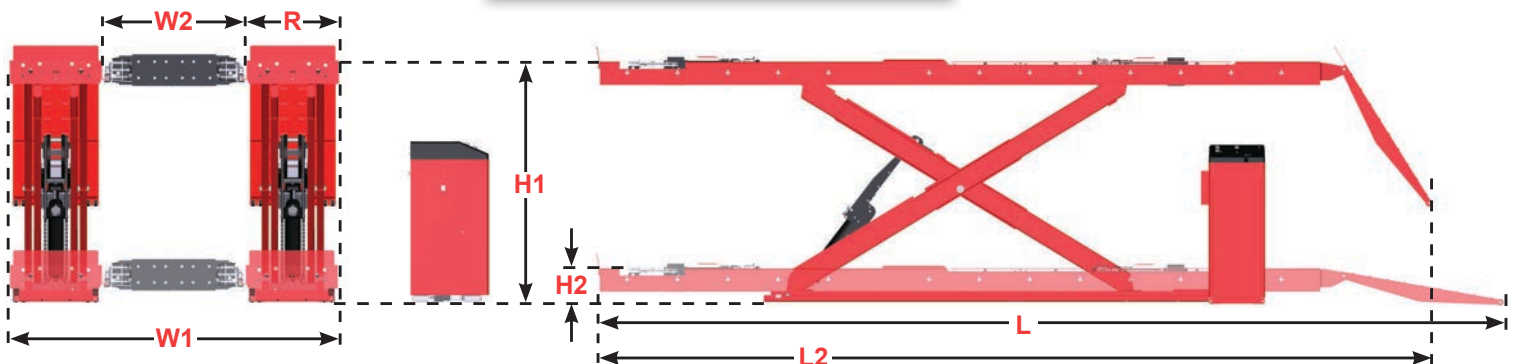

Continued on Page 2

For lift rack information visit:
www.hunter.com/rack

For general inquiries visit:
www.hunter.com
or call
800-448-6848


For local contact visit:
www.hunter.com/company/findrep.cfm

RX10K & RX10KL (std, PS & IS)

Surface Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS

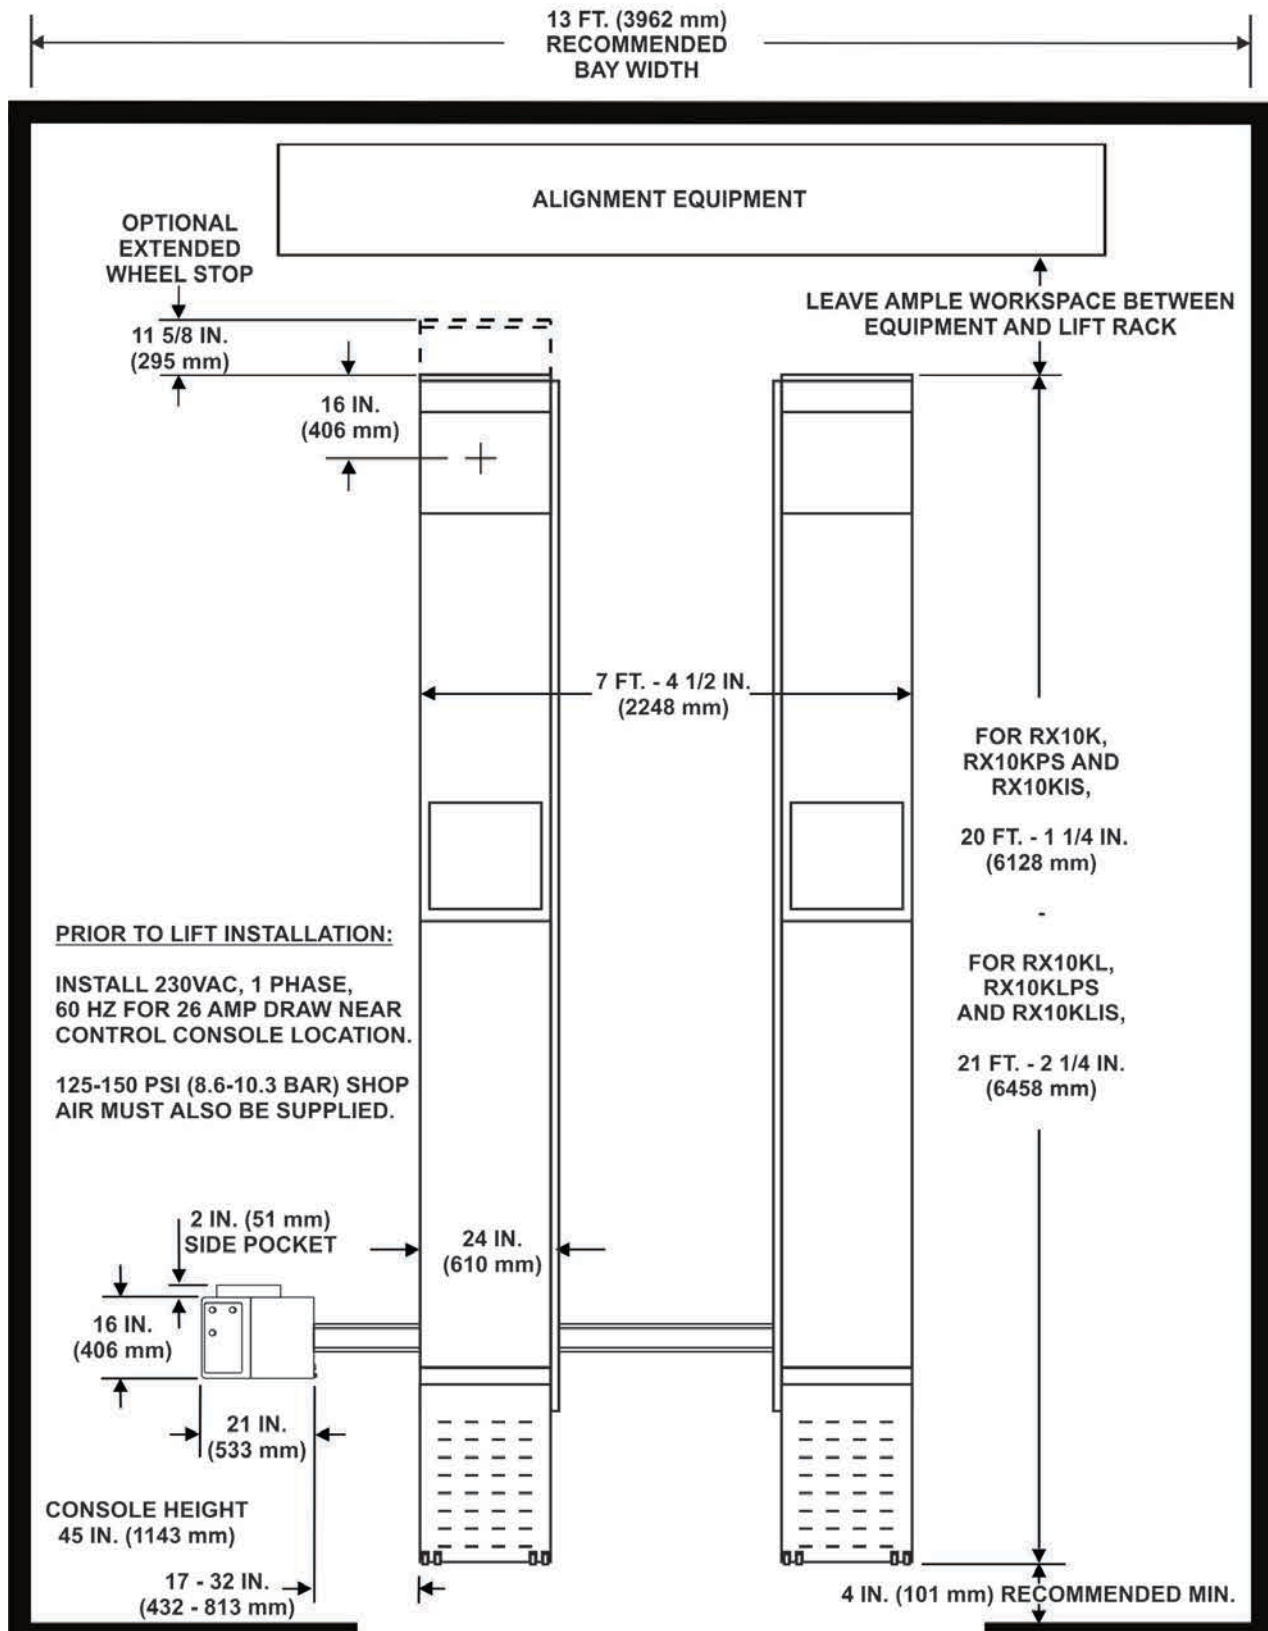

*Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 16 1/2 feet (5029 mm) at the turnplate end. Additional threshold will be required (refer to Installation Instruction for details).