


# RX12KF & RX12KFPS

## Flush Mount Lift Rack



### SPECIFICATIONS

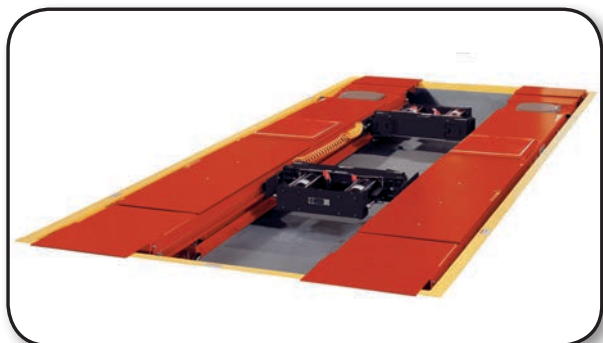

RX12KFPS Shown

#### Site Specifications

Floor Pocket Requirements	Refer to 7487-T for full details
Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	125-150 PSI (8.6-10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700 kPA) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)


#### Product Specifications

Max. Vehicle Weight	12,000 lbs. (5500 kg)
Max. Wheelbase	
General Service	180 in. (4572 mm)
Two-Wheel Alignment	175 in. (4445 mm)
Four-Wheel Alignment	158 in. (4013 mm)
Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed, 55 seconds
Lowering Speed	2 speed, 25 seconds

### MODEL FEATURES / DIMENSIONS

Feature	KF	KFPS
6000-lb Swing Air Jacks (2)	✓	✓
Two-Speed Lifting	✓	✓
FIA Fully Integrated Alignment		✓
POWER SLIDE		✓
INFLATION STATION		

Dimension	
Outside Width (W1)	88.5 in. 2248 mm
Inside Width (W2)	40 in. 1016 mm
Length (L)	228.375 in. 5801 mm
Runway Width (R)	24 in. 610 mm
Raised Height (H1)	71 in. 1803 mm
Depth (H2)	10.5 to 11.5 in. 267 mm to 292 mm

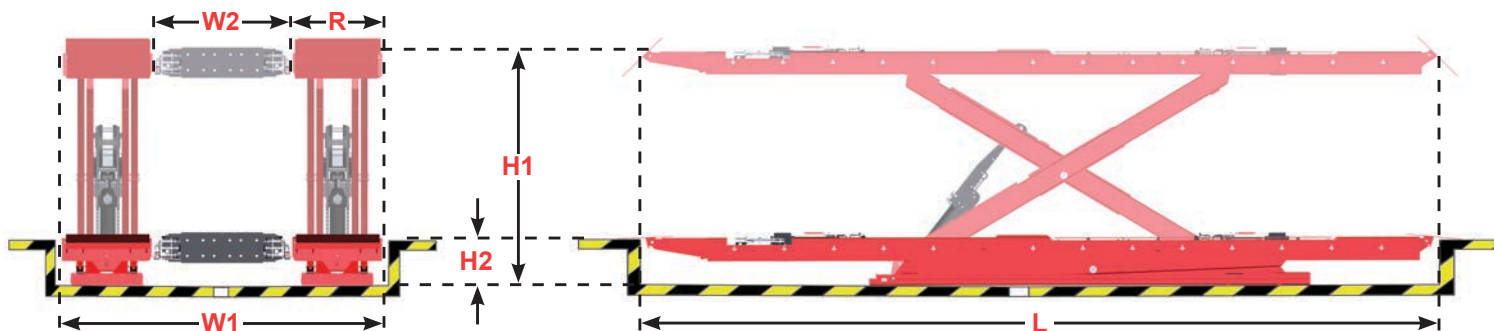

Continued on Page 2

For lift rack information visit:  
[www.hunter.com/lift-racks](http://www.hunter.com/lift-racks)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com)  
or call  
800-448-6848


For local contact visit:  
[www.hunter.com/contact-hunter](http://www.hunter.com/contact-hunter)

# RX12KF & RX12KFPS

Flush Mount Lift Rack



## SPECIFICATIONS (Refer to 7487-T for construction drawings)

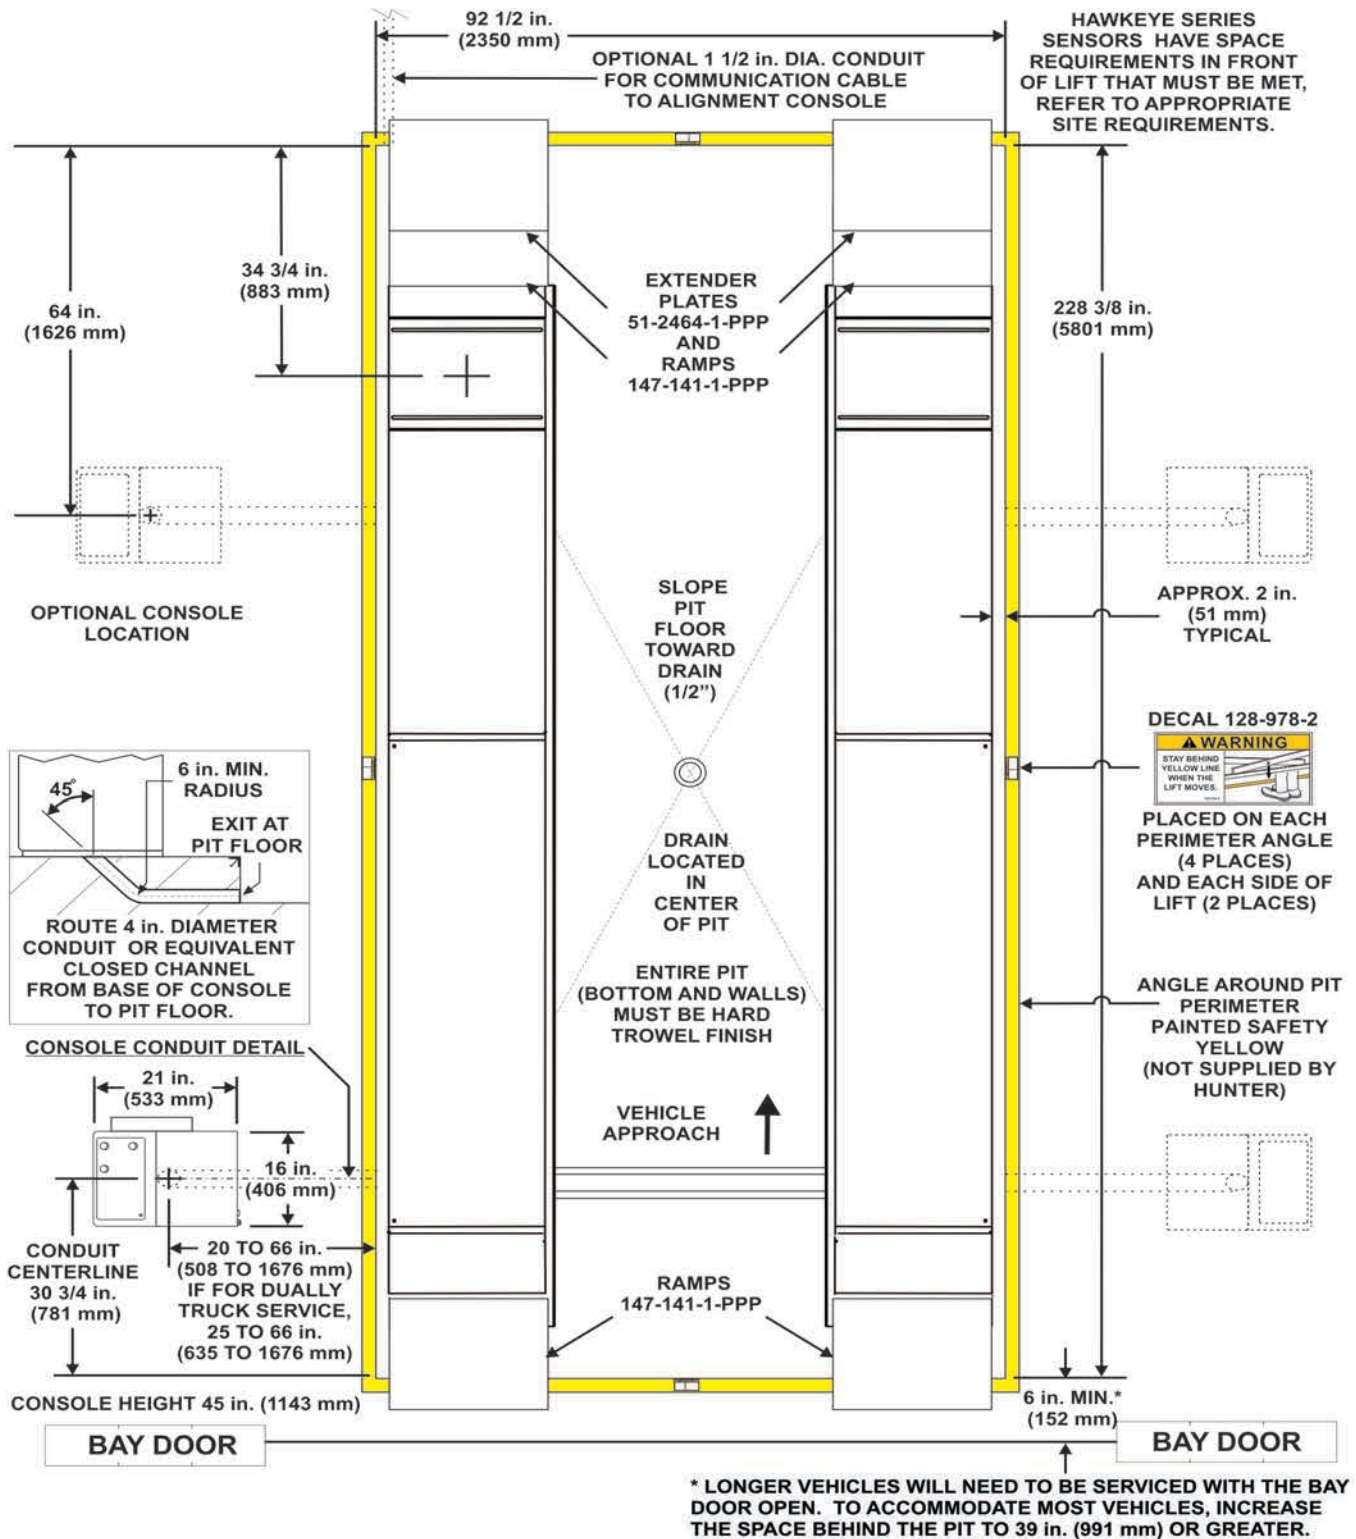

Dimensions shown are for end result. Tile thickness (if applicable) must be considered before pouring concrete. Positioning of control console is limited to a maximum space between console and rack of 5 1/2 feet (1676 mm) at the approach ramp end and 16 feet (4877 mm) at the turnplate end.