

SITE REQUIREMENTS

TC3700



TC3900



Shown with optional Side Shovel

TC3715SS



Shown with optional Side Shovel

TC3305



Shown with optional Plus Roller


	TC3900 Family	TC3700 Family	TC3300 Family
Power Requirements	208-230V, 15A, 60Hz, 1 ph NEMA 20 amp plug, L6-20P	208-230V, 15A, 60Hz, 1 ph NEMA 20 amp plug, L6-20P	208-230V, 12A, 60Hz, 1 ph NEMA 20 amp plug, L6-20P
Air Supply Requirements	115-145 psi (8-10 bar)	115-145 psi (8-10 bar)	115-145 psi (8-10 bar)
Shipping Weight	750 lbs (340 kg)	708 lbs (321 kg)*	515 lbs (234 kg)* **
Shipping Weight with Wheel Lift	875 lbs (397 kg)	850 lbs (386 kg)*	657 lbs (298 kg)* **
Width (W)	48 in. (1219 mm)	43 in. (1,092 mm)***	43 in. (1,092 mm)***
Height (H)	76 in. (1930 mm)	72 in. (1,829 mm)	72 in. (1,829 mm)
Depth (D)	58 in. (1473 mm)	43 in. (1,092 mm)	43 in. (1,092 mm)

* Add 76 lbs (34 kg) to weight for bead press arm, ** Add 89 lbs (40 kg) to weight for Plus device, *** Add 10 in. (254 mm) to width for wheel lift

KEY SPECIFICATIONS

	TC3900 Family	TC3700 Family	TC3300 Family
Mount / Demount Tool	Polymer Self-inserting leverless	Polymer Mount Head	Polymer Mount Head
Clamping Type	Center w/Quick Clamp and Cam Plate	Center w/Quick Clamp and Cam Plate	Center w/Quick Clamp
Bead Loosening Type	Rollers or Shovel (optional)	Rollers or Shovel (optional)	Shovel
Match Mounting Capable	Yes	Yes	No
Adjustable Clamping Height	Yes	Yes	No
Rim Diameter Range	10-28 in.	10-28 in.	10-26* in.
Maximum Tire Diameter	50 in.	50 in.	50 in.
Maximum Wheel Width	19 in.	19 in.	17 in.
Drive	7 and 15 rpm CW 15 rpm CCW	7 and 15 rpm CW 15 rpm CCW	15 rpm CW 15 rpm CCW

*Larger than 22" and reverse rim applicability on a case-by-case basis.

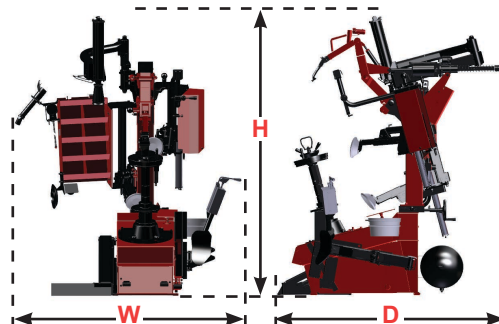

For tire changer information visit:
www.hunter.com/tire-changers

For local contact visit:
www.hunter.com/contact-hunter

For general inquiries visit:
www.hunter.com
or call
800-448-6848