

# TCX635HD & TCX635PHD


## Heavy Duty Tire Changer

**HUNTER**  
Engineering Company

### SITE REQUIREMENTS / KEY SPECIFICATIONS

SITE REQUIREMENTS	
Operating Voltage	208-240V, 1 ph, 60Hz, 20A NEMA L6-20P
Shipping Weight	1,168 lbs (530 kg)
Width (W)	86 in. (2,184 mm)
Height (H)	40 - 52 in. (1,016 - 1,321 mm)
Depth (D)	28 - 65 in. (711 - 1,651 mm)

SPECIFICATIONS	
Wheel Assembly	
Max. Diameter	58 in. (1,473 mm)
Max. Width	27 in. (686 mm)
Max. Weight	1,545 lbs. (700 kg)
Min. rim-center hole diameter	3.94 in (100 mm)
Max. rim diameter	14.5 - 24.5 in. (368 - 622 mm)
Match Mounting Capable	Yes
Torque	1,625 ft-lbs. (2,203 N•m)
Rotation Speed	9 rpm CW & CCW

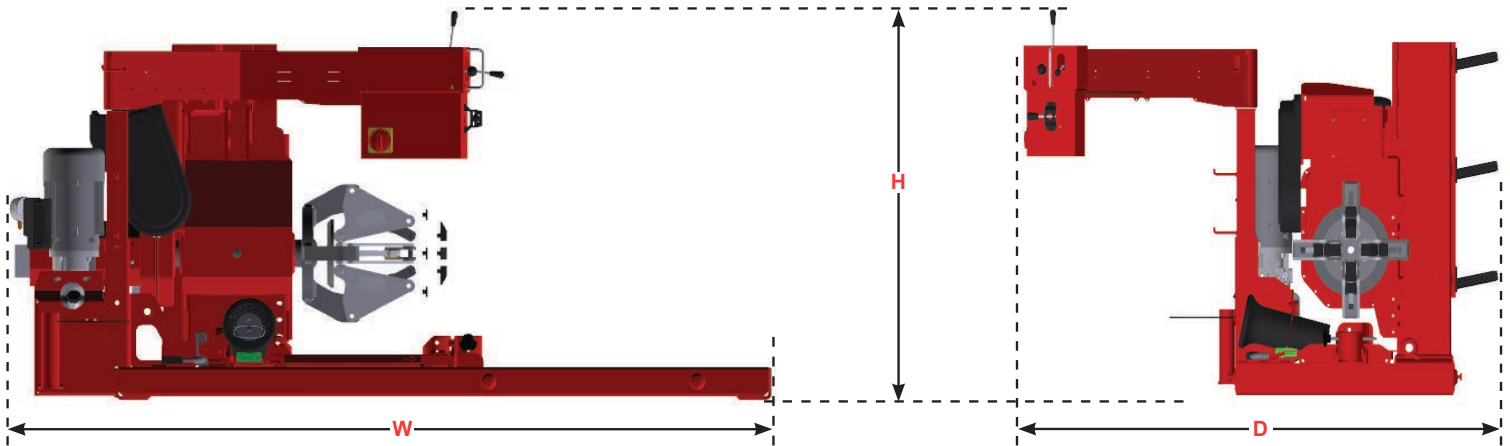

### MODEL ACCESSORIES



TCX635PHD Shown

For tire changer information visit:  
[www.hunter.com/tire-changers](http://www.hunter.com/tire-changers)

For general inquiries visit:  
[www.hunter.com](http://www.hunter.com) or call 800-448-6848

For local contact visit:  
[www.hunter.com/contact-hunter](http://www.hunter.com/contact-hunter)

ACCESSORIES	TCX635HD	TCX635PHD
Aluminum Wheel Clamp	✓	✓
Steel Wheel Clamp	✓	✓
Tire Paste & Brush	✓	✓
Hook & Hook Pin	✓	✓
Roller	✓	✓
Lever	✓	✓
Pocket V Cover	✓	✓
Two Ramps		✓
Mounting Lever		✓
Aluminum Jaw Covers		✓

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form CS07823-00, 09-20  
Copyright © 2016-2020, Hunter Engineering Company