




Unmanned Inspection Ordering Guide

How to choose a **Quick Check DRIVE** supergroup

1 Sensors



DRV1 Quick Check Drive® alignment sensors



Supergroups include:
BDC Damage-Cam with standard 15-day storage*



2 Console



WU592 wall-mounted Quick Check Drive® console



RECOMMENDED

3 Tire Tread



QTEF Quick Tread Edge® flush-mounted sensors



RECOMMENDED

4 Enhanced Vehicle ID



20-3584-1 External vehicle identification camera** (short focal length)



How to choose a **Quick Tread EDGE** supergroup

1 Sensors



QTE Quick Tread Edge® sensors



2 Console



WU592 wall-mounted Quick Tread Edge® console



RECOMMENDED

3 Flush-Mounting




QTEF Quick Tread Edge® flush-mounted sensors




4 Quick ID™



QIDS Quick ID™ vehicle identification system (short focal length)



Equipment also available in black (add **BLK** to part#)
QTE ramps available only in black

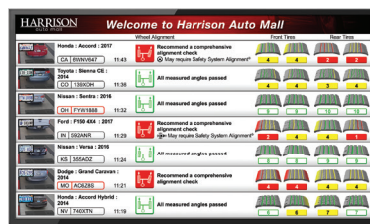

Automatic results display with Flightboard™

Results shown dependent on selected equipment.

Display sourced locally.

Refer to **7614-T** for more information.

* Requires active HunterNet® subscription (3-years included)

** Recommended for certain states or sites, refer to **7563-T** for more details

... or build your own system



Console

WU592	Wall-mounted Quick Check Drive® console 20-3356-1BLK Optional pedestal for WU592
WU572	Mobile Quick Check Drive® console



Body Image Capture

BDC	Damage-Cam with standard 15-day storage <i>Requires active HunterNet® subscription (3-years included)</i>
ES90	Annual subscription for 90-day extended image storage <i>Requires BDC package and active HunterNet® subscription</i>



QCD92TF – shown with optional 20-3356-1BLK pedestals



QTE92




Equipment also available in black (add **BLK** to part#)
QTE ramps available only in black

Quick Check, Quick Check Drive, Quick Tread Edge, and HunterNet are registered trademarks of Hunter Engineering company.

1119GH

Copyright © 2019, Hunter Engineering Company

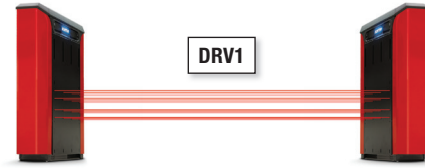

Alignment Sensors

DRV1	Quick Check Drive® alignment sensors
-------------	--------------------------------------



Tire Tread

QTEF	Flush-mounted Quick Tread Edge® sensors
QTE	Surface-mounted Quick Tread Edge® sensors <i>Not compatible with Quick Check Drive®</i>



Vehicle Identification

20-3584-1	Short focal length camera for Quick Check Drive® <i>For plate-to-camera distance of 96 in. or less Best for systems installed near service drive entrance</i>
20-3541-1	Long focal length camera for Quick Check Drive® <i>For plate-to-camera distance of greater than 96 in. Used with systems installed in the middle of service drive</i>
QIDS	Short focal length camera for Quick Tread Edge® <i>For plate-to-camera distance of 96 in. or less Best for systems installed near service drive entrance</i>
QID	Long focal length camera for Quick Tread Edge® <i>For plate-to-camera distance of greater than 96 in. Used with systems installed in the middle of service drive</i>

Refer to **7563-T** when choosing long or short focal length cameras.

HUNTER
Engineering Company

www.hunter.com

Form 7552-T, 11/19
Supersedes Form 7552-T, 07/19