

HARDWARE / SPECIFICATIONS / FEATURES



QCD92
(Pedestal Optional)



QCD72

HARDWARE

Power Requirements	115/230V, 15 amp*, 50/60 Hz, 1 ph †
Processor	3.7 Ghz Intel® Core™ i3
Memory	4 GB of DDR3 SDRAM
Hard Drive	250 GB Solid State Hard Drive (or greater)
DVD-RW/CD-RW Drive	Standard
Monitor Class	22" Widescreen LCD (QCD92) touchscreen 24" Widescreen LCD (QCD72)
Wireless Network Module	Yes - Standard
Operating System	Windows® 10 - 64 Bit
Unmanned Console	Standard
Printer (Optional)	HP Color Printer
Power Line Filter	Standard
Cable Length	75 ft. per tower (Cat5e)

PRODUCTIVITY TOOLS

Hunter QuickCheck® Software	Standard
Vehicle Specifications (30+ years)	Standard - 2 Years Free Updates
Real-Time Specs Delivered by Web	WebSpecs®
HunterNet®	3 Years Free Access for 1 User
QC Alignment Printout	Fully Customizable
Internet Connection	20 Mbps (Ethernet cable required)
License to VIN Service	Requires CARFAX EULA on File

*Amperage shown is minimal circuit rating. † Isolated Ground Recommended.

Continued on Reverse




For aligner information visit:
www.hunter.com/inspection

For local contact visit:
www.hunter.com/company/findrep.cfm

For general inquiries visit:
www.hunter.com or call **800-448-6848**

Because of continuing technological advancements, specifications, models and options are subject to change without notice.


QCD DIMENSIONS

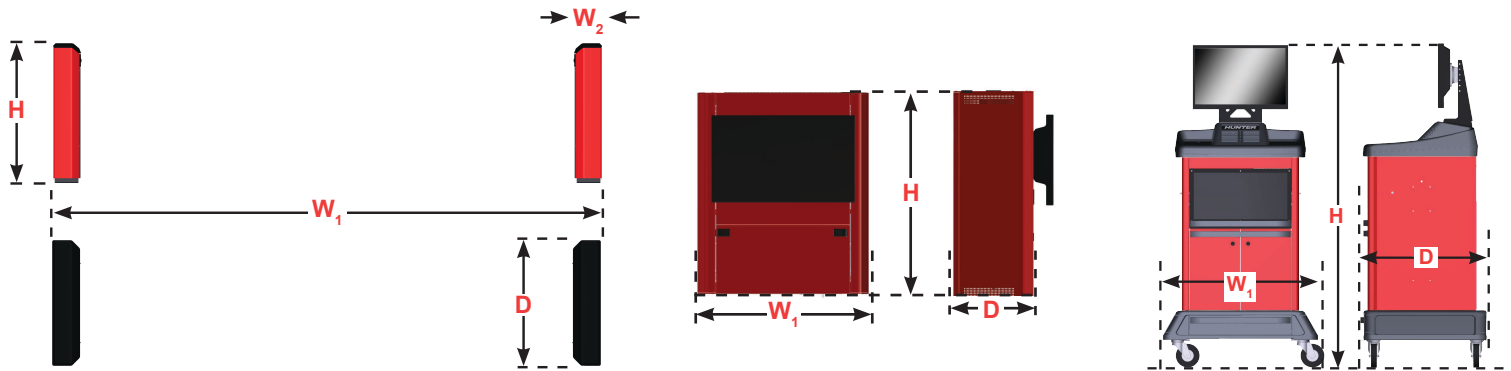

	QCD Sensors	WU592 Cabinet	WU572 Cabinet
Width 1 (W_1)	142 in. - 184 in. 3607 mm - 4674 mm	24 in. 610 mm	32 in. 813 mm
Width 2 (W_2)	8 in. (203mm)	-	-
Height (H)	41 in. 1041 mm	28.5 in. 724 mm	65 - 68 in. 1651 - 1727 mm
Height w/ optional pedestal	-	69.5 in. 1765 mm	-
Depth (D)	37 in. 940 mm	13.5 in. 343 mm	23.5 in. 597 mm
Shipping Weight	140 lbs (per tower) 64 kg	155 lbs. 70 kg	290 lbs. 132 kg


OPTIONAL IN-GROUND CONDUIT SPECIFICATIONS

PEDESTAL




ROUTE 76 MM MIN. DIAMETER CONDUITS (OR EQUIVALENT CLOSED CHANNEL) AS SHOWN.

TOWER ONE

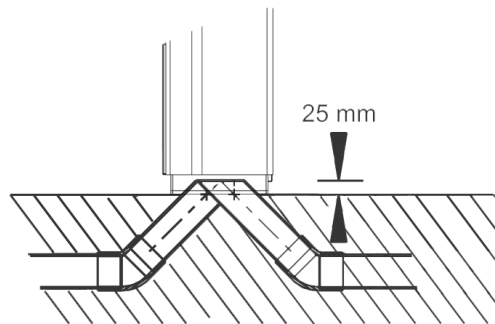

ROUTE CONDUIT FROM CONSOLE TO FIRST TOWER. ROUTE A SECOND CONDUIT FROM FIRST TOWER TO SECOND TOWER.

TOWER TWO

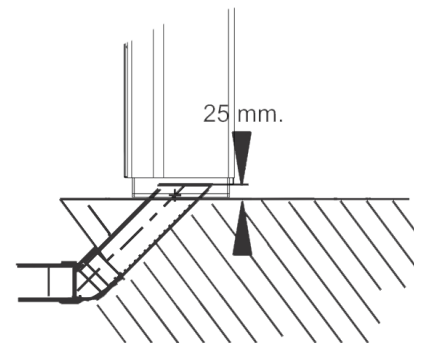

CONDUIT UNDER SECOND TOWER: 25 MM ABOVE GROUND

*76 mm (3 in.) conduit recommended throughout installation.

For aligner information visit:
www.hunter.com/inspection

For local contact visit:
www.hunter.com/company/findrep.cfm

For general inquiries visit:
www.hunter.com or call 800-448-6848

Because of continuing technological advancements, specifications, models and options are subject to change without notice.

Form 7560-T, 06-18a
Copyright © 2018, Hunter Engineering Company